


Atlantic 1080 Laminating systems are ideal for printing and finishing companies who want to do quality, mass production. Space saver, Atlantic 1080 completes perfectly the 91 (36") and 112 cm (44") wide printers.

Temperature control

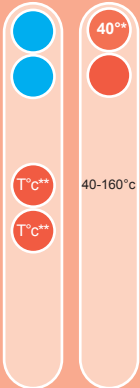

Pressure sensitive films :

- Lamination, encapsulation, adhesive setting, mounting
- *40°C recommended temperature for optimised results with cold films

Thermal films :

- Encapsulation with lamination films up to 250 microns thickness
 - Encapsulation with opaque backing substrates
 - Use of different type of film (finishing or texture) on top and bottom position
- T°C** Same adjustment for the upper and lower heating rollers

Pivoting feeding tray facilitates easy loading of film rolls. Connected to a safety device installed in the machine, it provides maximum security to user while loading.




This user friendly, easy to use machine can handle extremely demanding finishing requirement of images up to a width of 108 cms (42.5 Inches) with professional accuracy.



ATLANTIC 1080

Technical Specifications

Max. working width	1080 mm (42.5")
Length of the roller	1100 mm (43.7")
Diameter of the heating rollers	78 mm (3,1")
Max. thickness of print + board	25 mm (1")
Max. thickness of the film	250 microns / side
Adjustment and digital display of the heating rollers temperature	yes from 40 to 160°c
Digital display of the roller pressure	yes
Upper and lower winding and unwinding spindles	yes
Number of spindles delivered with the machine	4
Maximum speed (mtrs/minute)	3
Reverse operation	yes
Motor control pedal	yes
Emergency stop button	2
Stand mounted on self-locking castors	yes
Electrical print rewinding system	optional
Power of the motor (W)	100
Heating power (W)	3000
Voltage	230V / 50-60Hz single phase
Amperes	14 amps
Size of the machine on stand	L142 x D76 x H137 cm - (56"x30"x34")
Weight of the machine (kg)	184
Size of the shipping crate	L180 x D105 x H100 cm - (71"x42"x40")
Shipping weight (kg)	227
Made in France	
EC Certification	



Creative applications with Atlantic 1080



KALA SAS - Parc de l'Ecotay
35410 Nouvoitou - France

Tel. : +33 (0)2 99 37 64 64 - Fax : +33 (0)2 99 37 64 65
Internet : www.kala.fr - e-mail : info@kala.fr

We reserve the right to modify our models and equipments, as well as technical features without prior notice.